
New "CONTAX PREVIEW" System For Professional/Studio Applications



The CONTAX PREVIEW Camera with Built-in Polaroid Back is a special "accessory camera" designed for the professional Contax user. Accepting Polaroid film packs, the CONTAX PREVIEW allows the photographer to "pre-view" the photograph by taking an identical, 35mm-size Polaroid shot. This supplementary camera is a vital convenience for pre-checking such factors as exposure compensation or lighting. The camera body is extremely simple in construction, corresponding to the Polaroid Back CB102. Attached to this back is a shutter-equipped lens mount for all Contax/ Yashica bayonet mount lenses. The shutter operates at Bulb (B) and 1 to 1/1000 sec. speeds, with X-synchronization at 1/125 sec. A single-lens reflex design, the camera has a waist-level type viewfinder showing 95% coverage of the actual film area. An optional CONTAX PREVIEW right-angle finder is available for correct image eye-level use. Image size is identical to the standard 35mm frame (24 × 36mm format) on the instant-developing Polaroid film. This allows the photographer a clear, precise image which will be identical to the final shot. The finished Polaroid prints can be used simply for checking the photo situation, or for design/layout work or as teaching aids. In determining such factors as ambient light, or electronic flash exposure, shadow effects, perspective, etc., the CONTAX PREVIEW is invaluable since all Contax/Yashica bayonet mount lenses can be attached.

Light, compact and portable, the CONTAX PREVIEW Camera is ideal for both studio and location use, and is capable of responding to virtually any shooting conditions.

CONTAX
PREVIEW

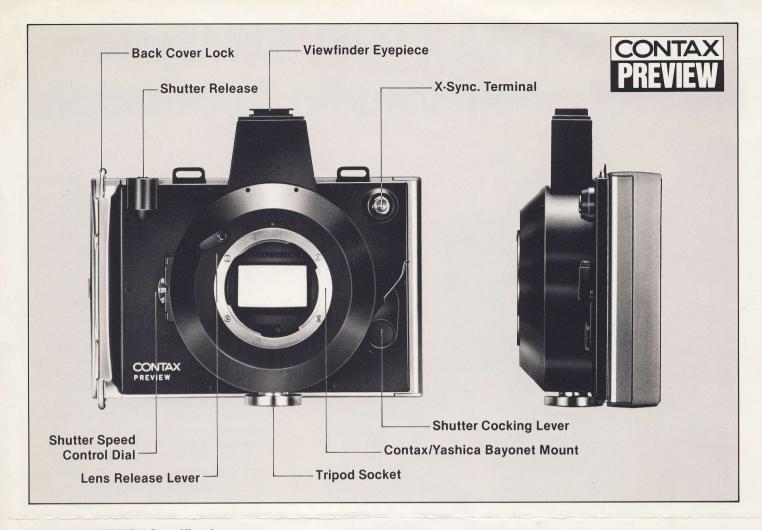

CONTAX PREVIEW Specifications:

Type:	Single-lens reflex camera
Film:	Polaroid (Type 107, Type 108 Polacolor 2, Type 665, Type 667, Type 668 Polacolor 2)
Image Size:	24 × 36mm
Lens Mount:	Contax/Yashica three-claw bayonet
Shutter:	Vertical-run, metal focal plane shutter with speeds from 1 to 1/1000 sec.
	plus B. Mechanical operation with x-synch at 1/125 sec.
Finder:	Waist-level type showing 95% of viewing area at 0.91X magnification (with 50mm lens)
Shutter Cocking:	Manual, via shutter cocking lever next to lens mount
Film Back:	Corresponds to Polaroid Back CB-102
Synchronization:	X-synch socket for electronic flash
Optional Accessories:	Right Angle Finder for CONTAX PREVIEW (correct image, eye-level)
Size:	168 × 145 × 67mm (6-5/8 × 5-11/16 × 2-5/8 in.)
Weight:	705 grams (24.9 oz.) (body only)

YASHICA/CONTAX DIVISION VASHICA EUROPE G.m.b.H. Billstraße 28, 2 Hamburg 28, West Germany Tei: 78 15 21/25 VASHICA HANDELSGESELLSCHAFT m.b.H. Rustenschacherallee 38, 1020 Wien, Austria Tei: (0222) 72-34-72, 73-581-27 VASHICA AG, Zürcherstraße 73, 8800 Thalwil, Switzerland Tei: (01) 720 34 34 VASHICA A/S Industrivinget 2, Dk-2600, Glostrup, Denmark Tei: 2-630806 VASHICA SVENSKA AB, Vasavagen 78, S-18141 Lidingo Sweden Tei: 08-767-9045 VASHICA DO BRASIL LTDA. YASHICA CO., LTD., Tokyo Office 20-3, Denenchofu-Minami, Ohta-ku, Tokyo 145, Japan 20-3, Denenchofu-Minami, Ohta-ku, Tokyo 145, Japan Tei: (30) 750-2240 Japan Tei: (30) 262-7300 Japan Tei: (30) 262-7300 Japan Tei: (31) 262-7300 Japan Tei: (31) 264-6050 Japan Tei: (31) 264-6050 Japan Tei: (31) 264-6050 Japan Tei: (31) 264-6050 Japan Tei: (31) 264-72140 Japan Tei: Tel: (404) 636-3535 YASHICA INC., Dallas Service Station Empire Center, Suite No. 124, 8383 Stemmons Freeway, Dallas, Texas 75247, U.S.A. Tel: (214) 630-2345 YASHICA CANADA INC. 7470 Bath Road, Mississauga, Ontario, L4T 1L2, Canada Tel: (416) 671-4300 Tel: 08-767-9045 YASHICA DO BRASIL LTDA. Rua Cruz e Souza 59, Aclimacao, Sao Paulo, Brasil Tel: 288-239, 289-9174 YASHICA HONSKONG CO., LTD. Room 1101, New World Office Building, 20 Salisbury Road. Kowloon, Hong Kong Tel: (3) 665216∼9

^{*}Specifications and design are subject to change without notice.
**"Polaroid" and "Polacolor" are registered trademarks of Polaroid Corporation, Cambridge, Mass. U.S.A.